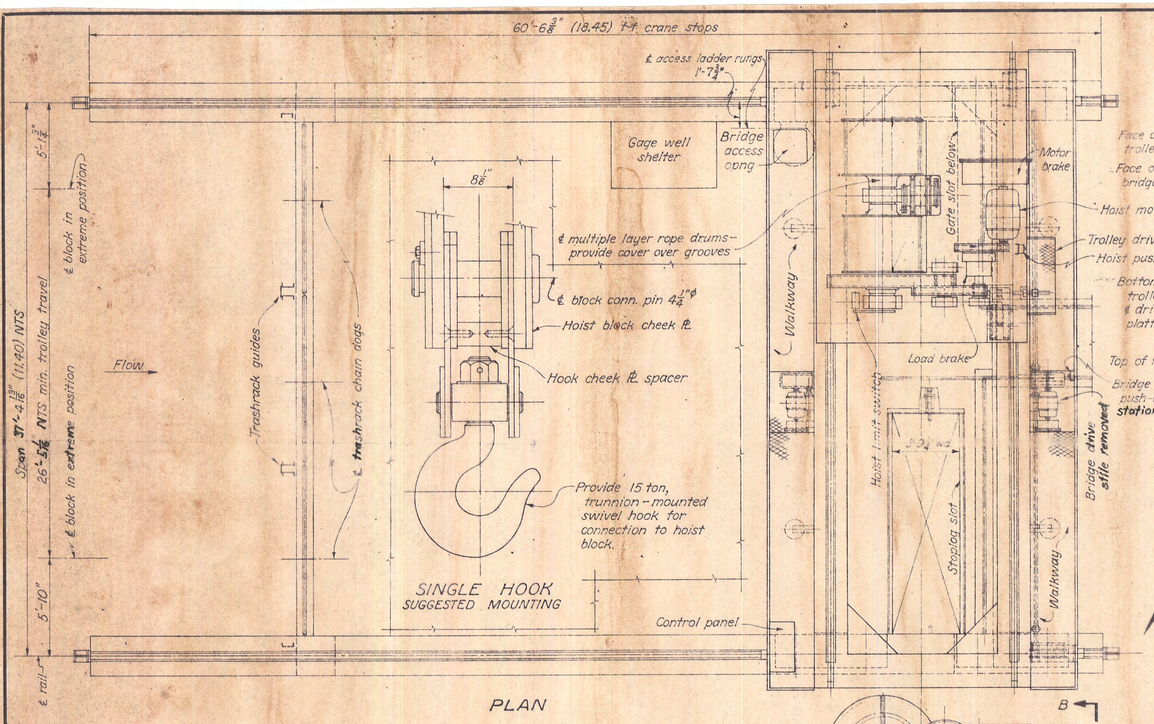

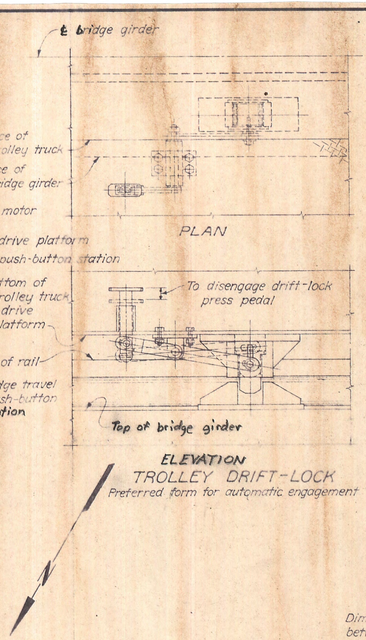

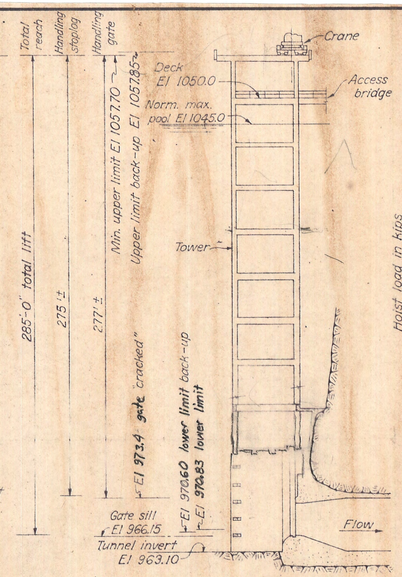

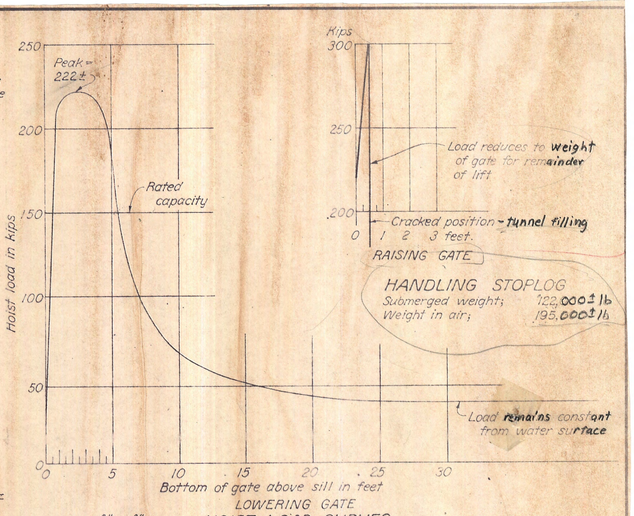

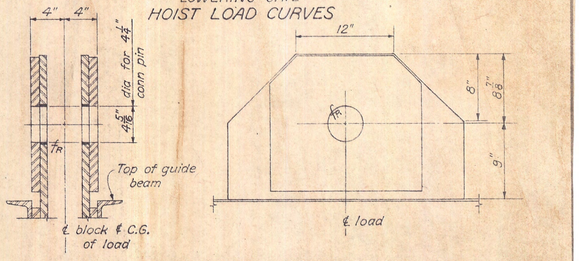

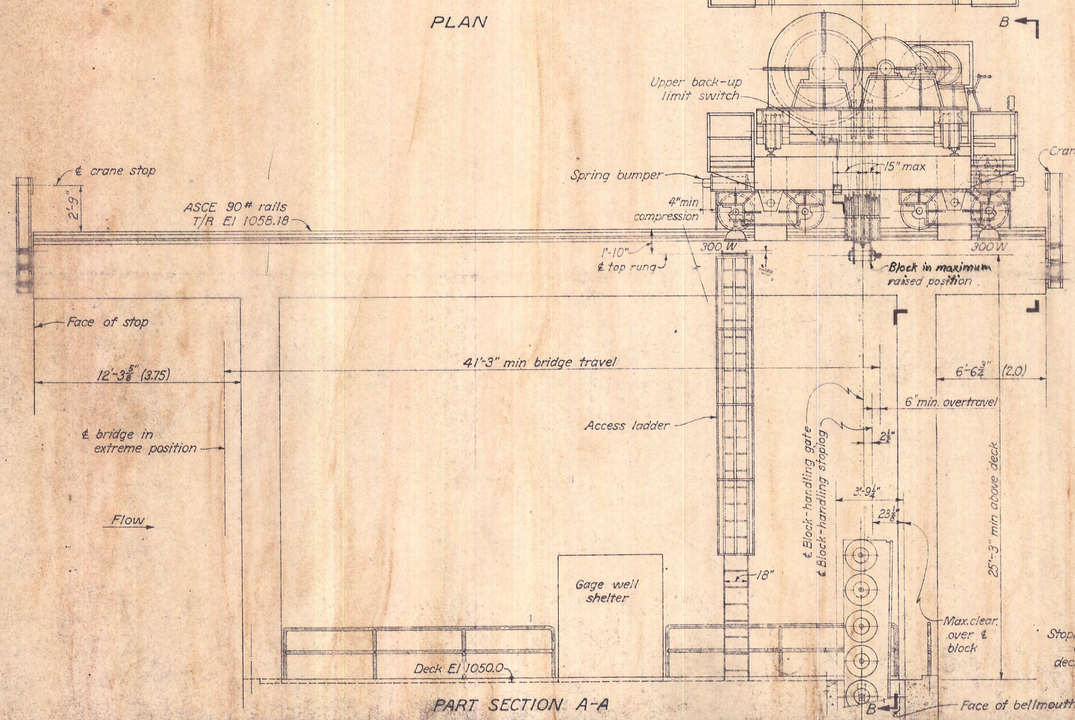

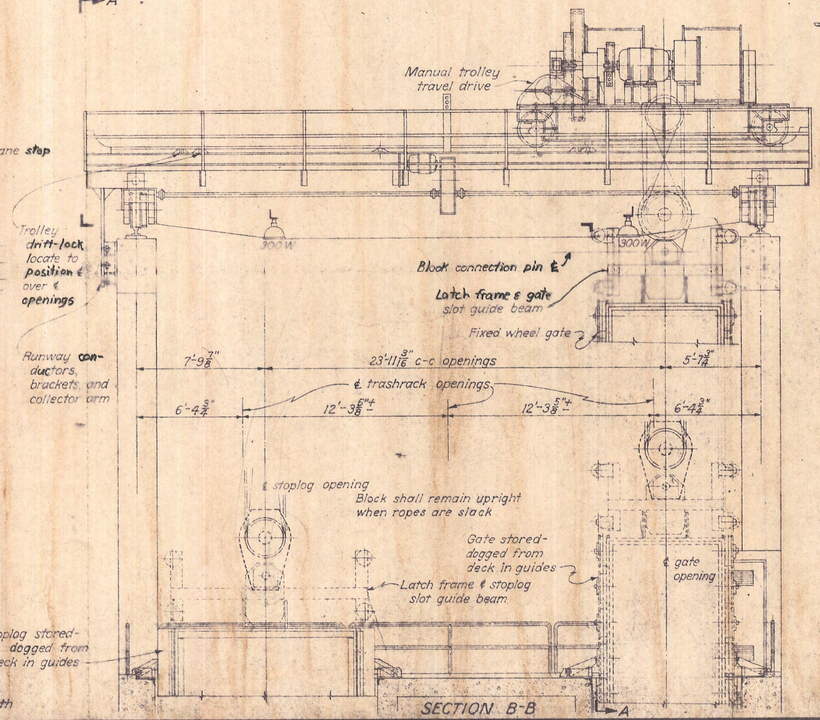

SPEEDS AND CAPACITIES

Rated capacity	150,000 lb.
Reach and speed of block	285'-0" @ 3½ fpm
Trolley	
Travel speed (no suspended load)	Manual drive
Travel distance	26'-6"±
Bridge	
Travel speed (50 kip load)	30± fpm.
Travel distance	41'-3"

NOTES

Power supply 400 volt, 3 phase, 50 cycle, 105 kva, .80 pf diesel-electric set.
Maximum motor torque shall not exceed 275% of normal motor torque.
All elevations, and dimensions in parentheses, are in meters.

MORRISON-KNUDSEN AFGHANISTAN, INC.

KAJAKAI DAM

IRRIGATION TUNNEL CRANE CLEARANCE DIAGRAM

INTERNATIONAL ENGINEERING CO., INC.

DESIGN K.V.A.	CHK'D K.V.A.	SUBMITTED
DRAWN P.R.H.	INSP. A.A.S. E.L.N.	RECOMMENDED
		APPROVED

15-F-8

DENVER, COLO. DATE MAR. 8, 1951