DO NOT SCALE

TOLERANCE ON FRACT. DIM. ±
AND ON DECIMAL DIM. ±
UNLESS OTHERWISE SPECIFIED.

No.	DESIGNATION	REQ'D
1	FIELD AMMETER	1
2	AMMETER	1
3	VOLTMETER	1
4	FREQUENCY METER	1
5	GROUND RELAY	1
6	VOLTAGE ADJUSTING RHEOSTAT	1
7	EXCITER FIELD RHEOSTAT	1
8	ROTOVALVE OIL PUMP Nº1 - P5	2
9	ROTOVALVE OIL PUMP Nº2 - P6	2
10	TUNNEL VENT FAN - P7	3 Φ
11	VALVE HOUSE VENT FANS - P9	3 Φ
12	SUMP PUMP - P4	2
13	BLANK	1
* 14	GEN. & UTIL. ROOM LIGHTS L1A & L1B	1
16	ENTRY & FAN ROOM LIGHTS - L1C	1
17	VALVE HOUSE & DECK RECEPT. - L1E	1
18	VALVE HOUSE & CHAMBER RECEPT - L1F	1
19	BLANK	1
20	STATION SERVICE GENERATOR	1
21	IRRIG. REG. VALVE 1 - P1	1
22	IRRIG. REG VALVE 2 - P2	1
23	IRRIG. REG. VALVE 3 - P3	1
25	BLANK	1
** 26	TUNNEL & CHAMBER LIGHTS - L1D	1
30	BLANK	1
31	BLANK	1
35	INTAKE DISTRIB. LINE - P8	1
36	BLANK	1
37	BLANK	1
38	BLANK	1
39	VALVE POSITION	3
41	VALVE OPERATOR	3
42	VALVE PUMP STARTER	3
43	SEE DETAIL DWG D-1855SF-1	3
44	" " " "	3
45	" " " "	3
46	" " " "	3EA

NAMEPLATE SCHEDULE

Φ FURNISH 1 NAMEPLATE SEPARATELY FOR FIELD MOUNTING - (ON REMOTE P.B. STATION IN FAN ROOM).

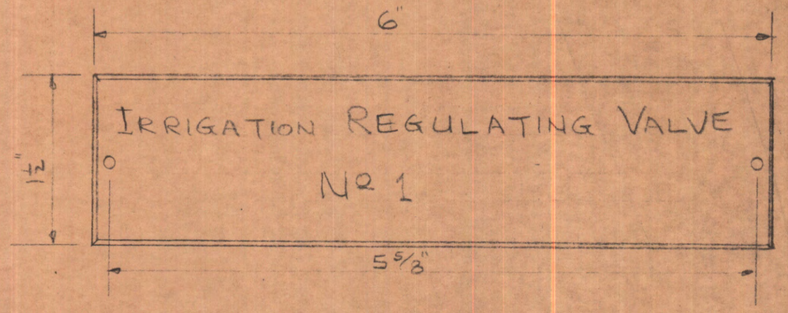

SPECIAL NAMEPLATE FOR EACH PANEL

2 5 - REQ'D

1 - IRRIGATION REGULATING VALVE Nº1
1 - " " " Nº2
1 - " " " Nº3
1 - VALVE HOUSE DISTRIBUTION
1 - STATION SERVICE GENERATOR



TYPICAL BAKELITE NAMEPLATE
SEE SCHEDULE

NOTES: ALL NAMEPLATES TO BE BLACK WITH WHITE LETTERS (LAMINATED WHITE CENTER STOCK - BEVELED)

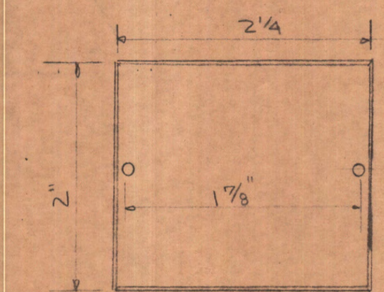

* SPECIAL NAMEPLATE FOR Nº 14

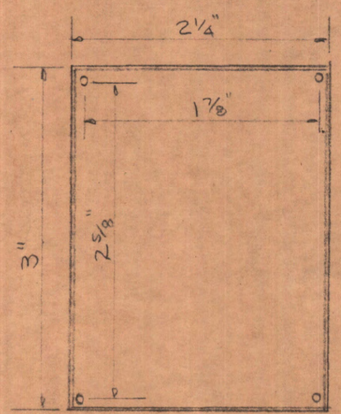

** SPECIAL NAMEPLATE FOR Nº 26

APPROVED

SUBJECT TO THE CONTRACT REQUIREMENTS AND CORRECTIONS WHICH MAY BE NOTED HEREON. THIS DOES NOT RELEASE THE MANUFACTURER FROM RESPONSIBILITY FOR COMPLIANCE WITH SPECIFICATIONS, BUT INDICATES A GENERAL APPROVAL OF THE DESIGN INHERENT WITH THE MATERIALS TO BE FURNISHED. MANUFACTURER SHALL BE FULLY RESPONSIBLE FOR PROPER FIT OF PARTS OF HIS OWN MANUFACTURE, AND FOR CONFORMANCE WITH DIMENSIONS OR MATERIALS CLEARLY SET FOURTH IN THE DESIGNS AND SPECIFICATIONS PREPARED FOR THIS WORK. APPROVAL DOES NOT CONSTITUTE ACCEPTANCE OF THE CORRECTNESS OF DIMENSIONS ORIGINATED BY THE MANUFACTURER IN CONNECTION WITH THIS WORK.

INTERNATIONAL ENGINEERING CO., INC.

By N.G. Holcomb Date Oct 7 52

NO.	DATE	REVISIONS	BY	APP'D
2	7-28-52	MINOR REVISION	H.K.	
1	7-17-52	GENERAL REVISIONS	H.K.	

CUSTOMER'S APPROVAL _____ DATE _____

CONTR M&K AFGHANISTAN P. O. NO. 11-6082	SALES APP'L
JOBBER PHILIP & EDWS P. O. NO. 8634	CH. DFTSM.
SCALE NONE DRN. BY H.K.	CHKD. BY

SQUARE D COMPANY
ELECTRICAL EQUIPMENT
WESTERN DIVISION

NAMEPLATE DETAILS
MORRISON KNUDSEN - AFGHANISTAN
KAJAKAI DAM - AFGHANISTAN

DATE 7-9-52
JOB NO. 6898

DWG. No. C-2059 SF-1